


art. AT

HOT WATER STORAGE TANK

Product designed, manufactured and tested to the requirements of PED 97/23/EC (art.3.3).

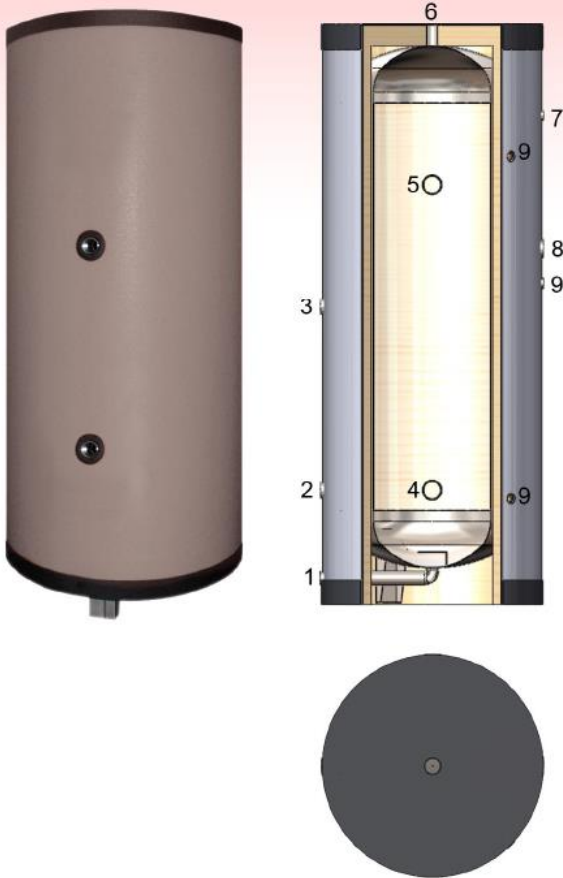

CONNECTIONS:

- 1 - cold water inlet/drain
- 2 - cold water inlet
- 3 - recirculation
- 4 - exchanger
- 5 - exchanger
- 6 - hot water outlet
- 7 - thermometer
- 8 - electrical element
- 9 - cathodic protection

MATERIAL:

AISI 316L - 1.4404
stainless steel

PICKLED AND PASSIVATED

TECHNICAL DESCRIPTION:

VERSION: vertical/horizontal

WORKING PRESSURE:

6 bar

WARRANTY: 8 years

INSULATION:


50 mm soft PU foam - grey PVC external lining

MAX WORKING TEMPERATURE:

storage 95°C

DESCRIPTION:

It's used for the storage of domestic hot water coming, typically, from plate exchangers. It is used in all cases in which a supply of hot water is needed.

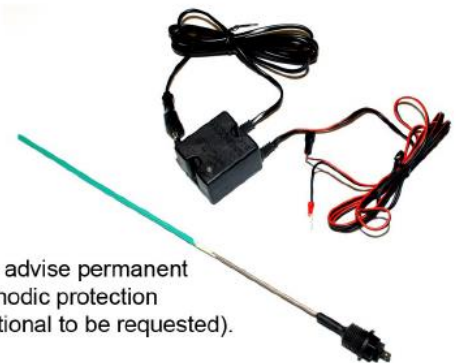

We advise permanent cathodic protection (optional to be requested).

| Model | u.m. | 200 | 300 | 500 | 800 | 1000 | 1500 | 2000 | 2500 | 3000 | 4000 | 5000 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Diameter (internal/total) | mm | 450 | 550 | 600 | 800 | 800 | 950 | 1100 | 1100 | 1250 | 1400 | 1600 |
| Total height | mm | 1420 | 1460 | 1900 | 1890 | 2140 | 2410 | 2450 | 2750 | 2770 | 2830 | 2860 |



Advanced Technical Products Ltd

Unit 219, Block C, Blanchardstown Corporate Park 2, Ballycoolin, Dublin 15
Tel: 01 885 3792, Email: info@atpireland.com, Web Site: www.atpireland.com